


4 Function Standard Transmitter

REPLACEMENT TRANSMITTER

92104TX 4 Function Standard Transmitter

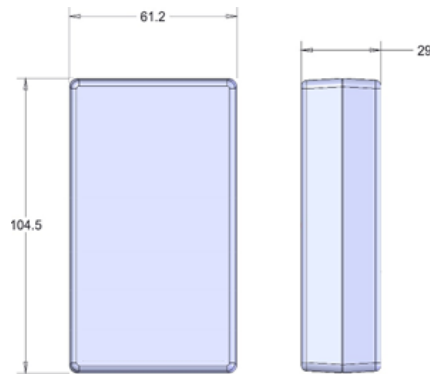

CONTENTS

- 1 x Standard Transmitter
- 1 x Lanyard
- 1 x Cover
- 1 x Instructions

TRANSMITTER SPECIFICATION

ENCLOSURE

Material	Glass reinforced Nylon
Switch Type	12mm Dome Switch
Functions	4
Identification	Pockets for printed text or image insertion

RF

Modulation	2-GFSK. Gaussian Frequency Shift Keying
Frequency	433.050 MHz to 434.790 MHz
Channels	1
Channel Selection	Fixed
Technology	Hand-held Transmitter
Temperature Range	-10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures
Range	60m (200ft)
Aerial	Internal – printed on PCB
Transmitted power	1mW Typical

POWER

Batteries	1x 9V Alkaline Manganese
Quiescent Current	15µA
Current Transmitting	20mA

PROTECTION

IP Rating	55
Registration codes	Over 16 million

INDICATOR

Type	1 x Red LED
Off	Transmitter is OFF and in standby mode
Slow flash	Transmitter is ON and ready for use (The SET Button has been pressed and released)
On	Transmitting (A STOP, SET or Function Button is being pressed)
Fast flash	Transmitting – Indication that the battery will need replacing soon

COMPLIANCE

FCC	FCC CFR 47-part 15.231 433.9MHz
IC	ISED RSS-210 Issue 8 433.9MHz
RoHS	Directive 2011/65/EU